

PC-562




PC-562P




PC-582




PC-563P



PL-563



PW-562

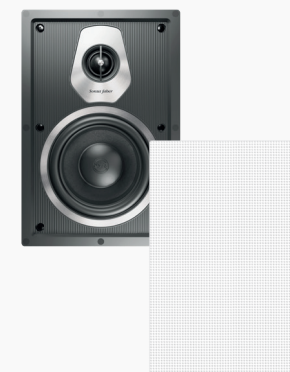

PS-G101



<b>Loudspeaker system</b>	2 way in-ceiling system. Infinite baffle.	2 way point in-ceiling system. Infinite baffle.	2 way in-ceiling system. Infinite baffle.	2 way point in-ceiling system. Infinite baffle.	2 way left/right/center in-wall system. Infinite baffle.	2 way in-wall system. Infinite baffle.	In-wall passive subwoofer. Infinite baffle.
<b>Tweeter DAD™ driver</b>	29 mm / 1.1"	29 mm / 1.1"	29 mm / 1.1"	29 mm / 1.1"	29 mm / 1.1"	29 mm / 1.1"	-
<b>Woofers/ Midwoofers</b>	165 mm / 6.5"	165 mm / 6.5"	200 mm / 8"	2 x 165 mm 2 x 6.5"	2 x 165 mm 2 x 6.5"	165 mm / 6.5"	250 mm / 10"
<b>Crossover frequency Paracross Topology™</b>	3,000 Hz	3,000 Hz	3,000 Hz	1,650 Hz	1,650 Hz	3,000 Hz	-
<b>Frequency response</b>	50 Hz - 25,000 Hz	50 Hz - 25,000 Hz	45 Hz - 25,000 Hz	45 Hz - 25,000 Hz	50 Hz - 25,000 Hz	50 Hz - 25,000 Hz	25 Hz - 1,000 Hz (**)
<b>Sensitivity (2.83v/1m)</b>	90 dB SPL	90 dB SPL	90 dB SPL	92 dB SPL	92 dB SPL	88 dB SPL	86 dB SPL
<b>Nominal impedance</b>	4 Ω	4 Ω	4 Ω	4 Ω	4 Ω	4 Ω	8 Ω
<b>Coverage Angle (1 kHz, @-6 dB)</b>	±60° H - ±60° V	±60° H - ±60° V	±60° H - ±60° V	±45° H - ±45° V	±45° H - ±60° V	±60° H - ±60° V	-
<b>Suggested amplifier power output (*)</b>	40 – 200 Wrms without clipping	40 – 200 Wrms without clipping	40 – 200 Wrms without clipping	40 – 250 Wrms without clipping	40 – 250 Wrms without clipping	40 – 200 Wrms without clipping	200 – 800 Wrms without clipping
<b>Frame outer</b>	Ø 234 mm / 9.2"	Ø 265,2 mm / 10.4"	Ø 283 mm / 11.1"	460 x 386 mm 18.1 x 15.1"	471 x 216 mm 18.5 x 8.5"	216 x 323 mm 8.5 x 12.7"	310 x 310 mm 12.2 x 12.2"
<b>Cut out</b>	Ø 208 mm / 8.19"	Ø 244 mm / 9.6"	Ø 257 mm / 10.1"	433 x 359 mm 17 x 14.1"	448 x 192 mm 17.6 x 7.6"	192 x 299 mm 7.6 x 11.8"	280 x 280 mm 11 x 11"
<b>Depth behind surface</b>	115 mm / 4.52"	170 mm / 6.70"	139 mm / 5.5"	148 mm / 5.82"	101 mm / 3.4"	101 mm / 3.4"	98 mm / 3.8"
<b>Protrusion</b>	10 mm / 0.40"	10 mm / 0.40"	13 mm / 0.51"	13 mm / 0.51"	13 mm / 0.51"	12 mm / 0.47"	23 mm / 0.9"
<b>Net Weight</b>	3,1 Kg / 6.8 lb	3,2 Kg / 7 lb	3,4 Kg / 7.5 lb	6,5 Kg / 14.3 lb	6,3 Kg / 13.9 lb	3,7 Kg / 8.2 lb	5,6 Kg / 12.4 lb
<b>Included in the box</b>	Bezel-Free round magnetic grille	Bezel-Free round magnetic grille	Bezel-Free round magnetic grille	Bezel-Free square magnetic grille	Bezel-Free square magnetic grille	Bezel-Free square magnetic grille	Bezel-Free square magnetic grille
<b>Additional fittings</b>	Bezel-Free square magnetic grilles	Bezel-Free square magnetic grilles	Bezel-Free square magnetic grilles	-	-	-	-
	Pre-mount kit	Pre-mount kit	Pre-mount kit	-	-	-	-

\* see instruction's manual for more information

\*\* unfiltered & unequalized. External filtering required

Sonus faber reserves the right to change any technical and/or aesthetic features of their products at any time without any previous notice.